


PMU2X Platform

Protected Memory Unit



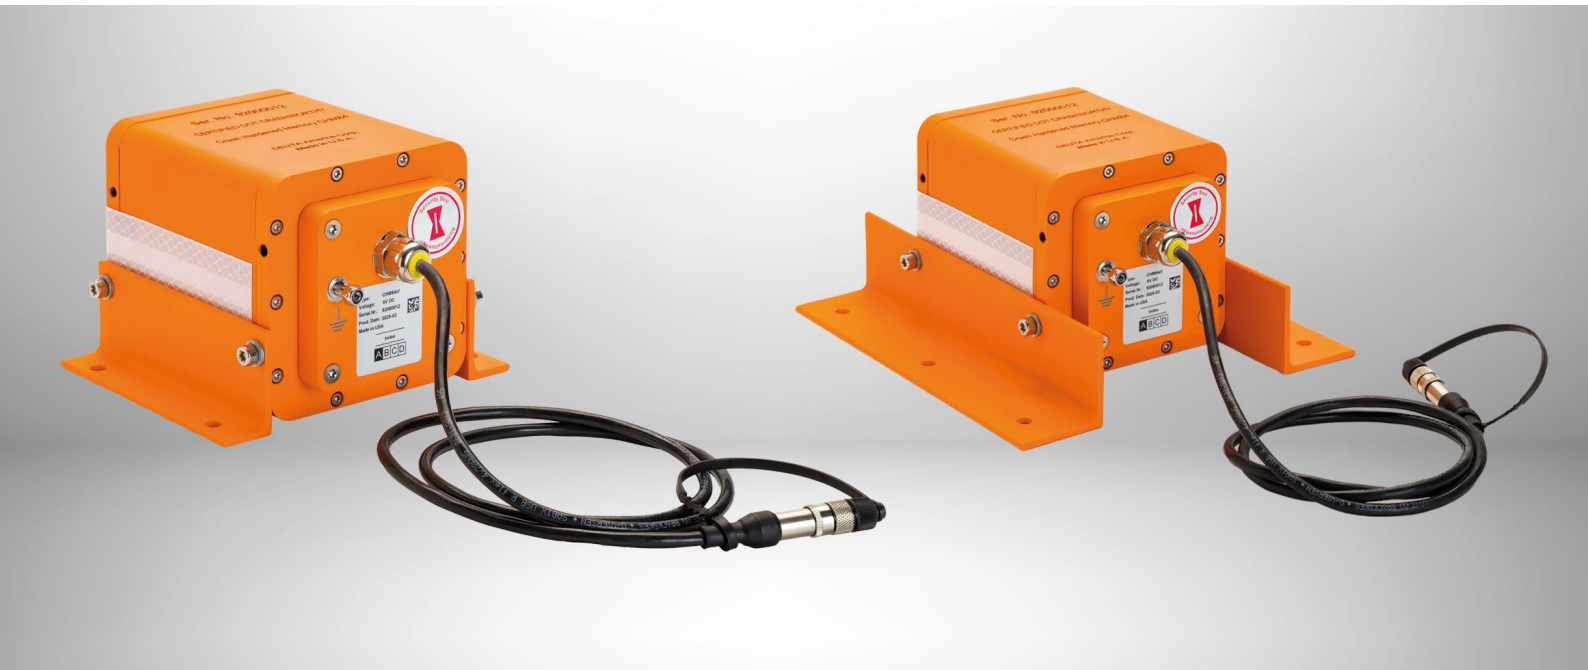

»PMU2X Platform –
Protected Memory Unit!«

Modular Protected Memory Unit

DEUTA PMU (Protected Memory Unit) completes the product line of DEUTA REDBOX® Multifunctional Recorders with protected travel data recorder units. The special structure of the housing is optimised to withstand the extreme mechanical and thermal stresses in exceptional situations.

Our new PMU2X product line is the cutting edge of innovation for crash protected memory solutions across markets and applications, allowing for the simple addition of crash memory to any system. The PMU2X is small, light, and can be either 19" rack mounted or bracket mounted.

Scalable, cost-efficient protected memory for data and video across multiple standards in a compact footprint.




PMU2X Platform

Feature/Specification	
Basic Standards	EN62625 and EN50155, IEEE1482.1:1999 & 2013, FRA 49 CRF Part 229, §229.135 Appendix D Table 1 Option A
Other Utilized Standards (where deemed applicable)	NFPA130, IEEE16, IEEE1478, AARS9401, AARS9101, EN 45545-2:2023 with Hazard Level 3, EN 61373 category 1, class B:2010, EN 50121-3-2:2017
Power Supply	via USB/PoE
Temperature range	-40°C to +85°C (operation) -40°C to +85°C (storage)
Storage Medium	internal flash
FTA Buy America Compliance	Yes




Variant	Standard	Capacity	Interface	Usage
PMU82	EN62625-1/IEEE1482.1:1999	256 GB - 1.5 TB	USB 2.0	Video
PMU22,23,25	IEEE1482.1:2013/FRA CFR49	16 GB - 128 GB	USB 2.0	Data
PMU26	IEEE1482.1:2013/FRA CFR49	256 GB - 1 TB	Ethernet	Video



Bracket Mounting

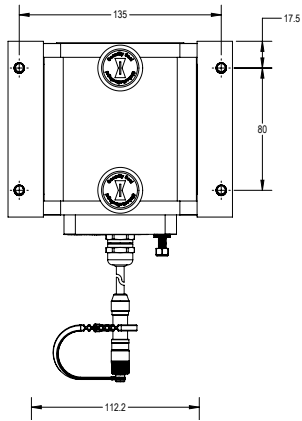

Rack Mounting

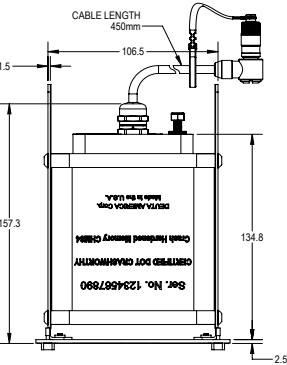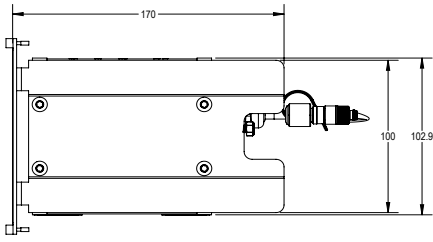

All units in mm



»PMU82 – According to IEEE1482.1:1999 –
Modular Crash Hardened Memory!«

Add high capacity Crash Hardened Memory to a IEEE1482.1:1999 system
This flexible PMU unit provides up to 1.5TB memory capacity in a small package supporting both 19" rack mounting or bracket mounting options. Default connection is a 90cm USB cable with a M8 4 pole connector.

The memory can be expanded from 16GB up to 1.5TB. Through the small size, the unit can be mounted separately, integrated in a 19" rack or even mounted inside an event recorder or a network video recorder.

PMU82 – According to IEEE1482.1:1999

Feature/Specification	
Crash Standard	EN62625-1/IEEE1482.1:1999
Basic Standards	EN50155, IEEE1482.1:1999
Other Utilized Standards (where deemed applicable)	NFPA130, IEEE16, IEEE1478, AARS9401, AARS9101, EN 45545-2:2023 with Hazard Level 3, EN 61373 category 1, class B:2010, EN 50121-3-2:2017
Power Supply	via USB
Temperature range	-40°C to +85°C (-40°F to +185°F) (operation) -40°C to +85°C (-40°F to +185°F) (storage)
Storage Medium	internal flash
Capacity	16 GB - 1.5 TB
Interface	M8 USB 2.0, 4 pole
Usage	Data
FTA Buy America Compliance	Yes

Housing Dimensions	
Width	102.7 mm (4,0")
Height	102.7 mm (4,0")
Depth	170 mm (6,7")
Weight	3.4 kg (7.5 lbs)

Mounting Options

19" rack mounting:	
Width	121.6 mm or 152.1 mm (4.8" or 6.0")
Height	128.4 mm (5.1")
Depth	170 mm (6.7")
Weight	with mounting 3.9 kg (8.9 lbs)

Large brackets:	
Width	192 mm (7.6")
Height	106,4 mm (4.2")
Depth	200 mm (7.9")
Weight	with mounting 4.7 kg (10.4 lbs)

Small brackets:	
Width	150 mm (5.9")
Height	106,4 mm (4.2")
Depth	170 mm (6.7")
Weight	with mounting brackets: 4.2 kg (9.2 lbs)





»PMU 22/2, 23/2, 25/2 –
According IEEE2013/FRA 49CFR data –
Modular Crash Hardened Memory!«

A small size and low weight Protected Memory Unit still meets all the existing crash protection standards for the railway industry and provides memory capacity up to 128GB.

The design is flexible and modular and can be delivered with multiple bracket mounted designs and 19" rack mounted designs. The unit can be used as a standalone protected memory or integrated into a recorder. The unit provides a USB connected interface with multiple connectors and cable length.

PMU22/2, 23/2, 25/2 - According IEEE2013/FRA 49CFR data

Feature/Specification	
Crash Standard	IEEE1482.1:2013, EN 62625 and FRA 49 Part 229
Basic Standards	EN50155
Other Utilized Standards (where deemed applicable)	OK
Power Supply	via USB
Temperature range	-40°C to +85°C (-40°F to +185°F) (operation) -40°C to +85°C (-40°F to +185°F) (storage)
Storage Medium	internal flash
Capacity	16 GB - 128 TB
Interface	M8 USB 2.0, 4 pole
Usage	Data
FTA Buy America Compliance	Yes

Housing Dimensions (including bracket)	
Width	102,7 mm (4.0")
Height	102,7 mm (4.0")
Depth	170 mm (6.7")
Weight	3.3 kg (7.3 lbs)

Mounting Options

19" rack mounting: PMU22/2 & PMU25/2:	
Width	PMU 22/2: 121.6 mm (4.8") or PMU25/2: 152.1 mm (6.0")
Height	128.4 mm (5.1")
Depth	170 mm (6.7")
Weight	with mounting 3.8 kg (8.4 lbs)

Large brackets: PMU23/2	
Width	192 mm (7.6")
Height	106,4 mm (4.2")
Depth	200 mm (7.9")
Weight	with mounting 4.6 kg (10 lbs)

small brackets: PMU23/2	
Width	150 mm (5.9")
Height	106,4 mm (4.2")
Depth	170 mm (6.7")
Weight	with mounting brackets: 4.1 kg (9 lbs)



PMU23/2



PMU22/2
PMU25/2



»PMU26 & PMU26/2 – According IEEE2013/FRA 49 CFR video – Modular Crash Hardened Memory!«

Easily Add IEEE/FRA Protected Memory Units to Existing Systems!

Applied to IEEE1482.1: 2013 and FRA 49 CFR 229 standards, both PMU26 and PMU26/2 Protected Memory Unit allows for effortless integration to new or existing systems. The PMU26 is today offered with 256 GB, 512 GB or 1 TB capacity and 1.5 TB future capacity while the much smaller PMU26/2 will be offered up to 1 TB capacity. Both units utilize an on-board ethernet network interface, adding Protected Memory Unit is simple and straightforward requiring minimal modifications to existing systems.

PMU26 Highlights:

- 256 GB, 512 GB or 1 TB memory capacity, 1.5 TB to be released
- Ethernet communication
- Web-based service PC interface
- 24 – 110 V DC wide-range power supply
- FRA 49 CFR Part 229, § 229.135 Appendix D
- IEEE Std. 1482.1-2013, Part 4.6
- Optimized for video data protection
- On-board processing capabilities

PMU26/2 Highlights:

- Up to 1 TB memory capacity
- Ethernet communication
- Web-based service PC interface
- Power over Ethernet power supply
- FRA 49 CFR Part 229, § 229.135 Appendix D
- IEEE Std. 1482.1-2013, Part 4.6
- Optimized for video data protection
- On-board processing capabilities
- S.M.A.R.T.-like memory diagnostic interface

PMU26 & PMU26/2 – According IEEE2013/FRA 49 CFR video

Feature/Specification	PMU26aj	PMU26/2aj*
Crash Standard	CFR 49 229 App. D, IEEE1482.1:2103	CFR 49 229 App. D, IEEE1482.1:2103
Other Standards	EN50155, EN45545, etc	EN50155, EN45545, etc
Power	24-110V DC	PoE
Power (super capacitor)	None	> 5 seconds
Temperature range	-40°C to +70°C (operation) -40°C to +85°C (storage)	-40°C to +70°C (operation) -55°C to +85°C (storage)
Capacity	1 TB	1 TB
Nominal TBW	512 TB	3,072 TB
Interface	10/100 Mbps Ethernet	10/100/1000 Mbps Ethernet
Network Storage	SAMBA	SAMBA, NFT
Mounting	Brackets	Brackets (optionally 19" rack)
MTBF	800,000 hours	800,000 hours

Dimensions (approx.)		(standard brackets)
Width	160 mm (6.3")	102 mm (4")
Height	160 mm (6.3")	102 mm (4")
Depth	282 mm (11.1")	165 mm (6.5")
With brackets		(standard brackets)
Width	221 mm (8.7")	190 mm (7.5")
Height	165 mm (6.5")	107 mm (4.2")
Depth	305 mm (12")	165 mm (6.5")
Optional brackets		(small brackets)
Width		150 mm (5.9")
Height		107 mm (4.2")
Depth		165 mm (6.5")
Weight (w/o brackets)	13,6 kg (30 lbs)	4,1 kg (9 lbs)

* Forecasted values. To be validated during 2025.

The easy-to-add PMU to existing systems:

- Video and voice recording
- Train data recording with DEUTA REDBOX®
- Monitoring and diagnostic system or other peripheral system

DEUTA-WERKE

Paffrather Straße 140 | 51465 Bergisch Gladbach | Germany
Phone +49 (0) 2202 958-100 | Fax +49 (0) 22 02 958-145
support@deuta.de | www.deuta.com | www.icontrust.com



DEUTA-WERKE GmbH | Paffrather Str. 140 | 51465 Bergisch Gladbach | Germany | Phone +49 (0) 2202 958-100 | Fax +49 (0) 22 02 958-145 | E-Mail: support@deuta.de | www.deuta.com
Represented by the Managing Directors: Mr. Dr. Rudolf Ganz and Mr. Thomas Blau | Register court: Amtsgericht Köln, Register number: HRB Köln 67 107 | Value added tax identification number: DE 265417448 | Pictures and articles including any other contents printed in the brochure are proprietary. Reprinting, copying, distributing or any other actions that violate copyright are subject to prior written authorization by DEUTA-WERKE GmbH.

The information contained in this brochure is intended for general informational purposes only and represents examples of our standard products. It does not constitute a guarantee of technical specifications or features. DEUTA-WERKE GmbH has checked the information carefully, however, it assumes no liability for the timeliness, correctness and completeness or quality of the provided information. Any required special features shall be subject to a separate individual agreement at the time of purchase. Only those variations of the pictured standard products explicitly agreed upon at the time of purchase shall be considered binding.

The products pictured and described in this brochure reflect their status at the time of final editing, however, DEUTA-WERKE GmbH reserves the right to make changes in the meantime.
The names DEUTA REDBOX®, IconTrust®, SelectTrust®, SignalTrust®, MouseTrust®, D-SmartView®, D-EcoView®, D-PowerView® and DEUTA RedCloud® are registered trademarks of DEUTA-WERKE GmbH. IconTrust® and SelectTrust® are patented inventions owned by DEUTA-WERKE GmbH. The use of these trademarks and patents is prohibited without the prior written consent of DEUTA-WERKE GmbH.